WEVER & DUCRÉ LIGHTING

MILES 2.0 ROUND

317578Q3


PROJECT

TYPE


NOTES

QUANTITY

DATE

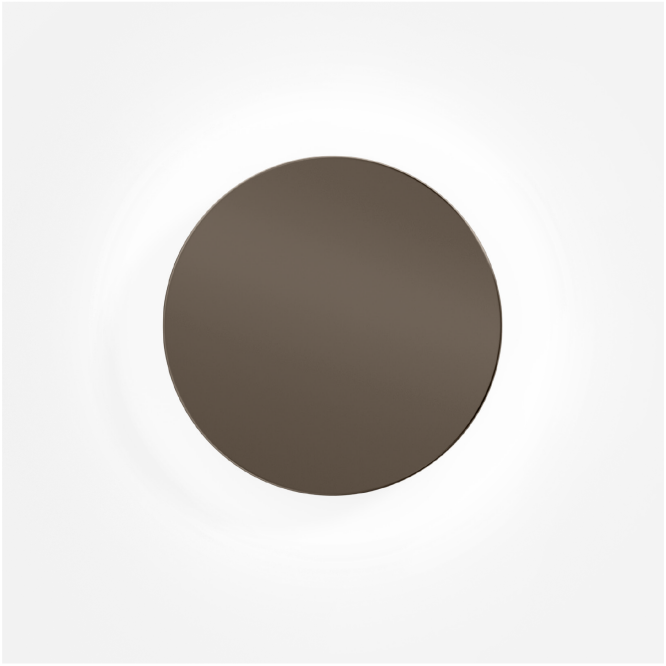

Disc shaped wall surface luminaire RAL 7013; PCB; phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Wall
Surface
Bronze Brushed
RAL 7013 [a]
IP20
Interior
285 lm

LED MODULE

2700 K
CRI ≥ 90
L80 / 70000 h
≤ 3 SDCM (initial MacAdam)

OPTICAL

Indirect
CIE flux code: 0 1 23 28 100

ELECTRICAL


phase-cut dim
220 - 240 V
system 8.5 W
Class II

PHYSICAL

diameter 190 mm
height 38 mm
0.7 kg

[a] Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.92	0.89	0.86
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF
MF	Maintenance Factor
LMF[a]	Luminaire Maintenance Factor
RSMF[a]	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor

[a]According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

['317578Q3'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com